


150磅/Lb、300磅/Lb

根据 ASME B 16.5 RTJ的钢管法兰

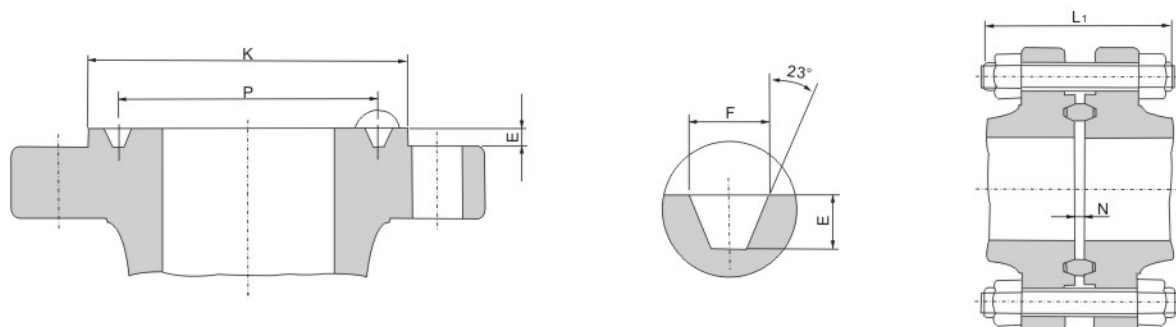

压力	公称尺寸		环号	P		E		F		K		N		L1	
	NPS	DN		in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
150	1	25	R15	1.875	47.63	0.25	6.35	0.344	8.74	2.50	64	0.16	4	3.00	76
	1	32	R17	2.250	57.15	0.25	6.35	0.344	8.74	2.88	73	0.16	4	3.25	83
	1	40	R19	2.562	65.07	0.25	6.35	0.344	8.74	3.25	83	0.16	4	3.25	83
	2	50	R22	3.250	82.55	0.25	6.35	0.344	8.74	4.00	102	0.16	4	3.75	95
	2	65	R25	4.000	101.60	0.25	6.35	0.344	8.74	4.75	121	0.16	4	4.00	102
	3	80	R29	4.500	114.30	0.25	6.35	0.344	8.74	5.25	133	0.16	4	4.00	102
	4	100	R36	5.875	149.23	0.25	6.35	0.344	8.74	6.75	171	0.16	4	4.00	102
	5	125	R40	6.750	171.45	0.25	6.35	0.344	8.74	7.62	194	0.16	4	4.25	108
	6	150	R43	7.625	193.68	0.25	6.35	0.344	8.74	8.62	219	0.16	4	4.50	114
	8	200	R48	9.750	247.65	0.25	6.35	0.344	8.74	10.75	273	0.16	4	4.75	121
	10	250	R52	12.000	304.80	0.25	6.35	0.344	8.74	13.00	330	0.16	4	5.00	127
	12	300	R56	15.000	381.00	0.25	6.35	0.344	8.74	16.00	406	0.16	4	5.25	133
	14	350	R59	15.625	396.88	0.25	6.35	0.344	8.74	16.75	425	0.12	3	5.75	146
	16	400	R64	17.875	454.03	0.25	6.35	0.344	8.74	19.00	483	0.12	3	5.75	146
	18	450	R68	20.375	517.53	0.25	6.35	0.344	8.74	21.50	546	0.12	3	6.25	159
	20	500	R72	22.000	558.80	0.25	6.35	0.344	8.74	23.50	597	0.12	3	6.75	171
	24	600	R76	26.500	673.10	0.25	6.35	0.344	8.74	28.00	711	0.12	3	7.25	184
300	1	25	R16	2.000	50.80	0.25	6.35	0.344	8.74	2.75	70	0.16	4	3.50	89
	1	32	R18	2.375	60.33	0.25	6.35	0.344	8.74	3.12	79	0.16	4	3.75	95
	1	40	R20	2.688	68.28	0.25	6.35	0.344	8.74	3.56	90	0.16	4	4.00	102
	2	50	R23	3.250	82.55	0.312	7.92	0.469	11.91	4.25	108	0.22	6	4.00	102
	2	65	R26	4.000	101.60	0.312	7.92	0.469	11.91	5.00	127	0.22	6	4.50	114
	3	80	R31	4.875	123.83	0.312	7.92	0.469	11.91	5.75	146	0.22	6	4.75	121
	4	100	R37	5.875	149.23	0.312	7.92	0.469	11.91	6.88	175	0.22	6	5.00	127
	5	125	R41	7.125	180.98	0.312	7.92	0.469	11.91	8.25	210	0.22	6	5.25	133
	6	150	R45	8.312	211.12	0.312	7.92	0.469	11.91	9.50	241	0.22	6	5.50	140
	8	200	R49	10.625	269.88	0.312	7.92	0.469	11.91	11.88	302	0.22	6	6.00	152
	10	250	R53	12.750	323.85	0.312	7.92	0.469	11.91	14.00	356	0.22	6	6.75	171
	12	300	R57	15.000	381.00	0.312	7.92	0.469	11.91	16.25	413	0.22	6	7.25	184
	14	350	R61	16.500	419.10	0.312	7.92	0.469	11.91	18.00	457	0.22	6	7.50	191
	16	400	R65	18.500	469.90	0.312	7.92	0.469	11.91	20.00	508	0.22	6	8.00	203
	18	450	R69	21.000	533.40	0.312	7.92	0.469	11.91	22.62	575	0.22	6	8.25	210
	20	500	R73	23.000	584.20	0.375	9.53	0.531	13.49	25.00	635	0.22	6	8.75	222
	24	600	R77	27.250	692.15	0.438	11.13	0.656	16.66	29.50	749	0.25	6	10.00	254

600磅/Lb、900磅/Lb、1500磅/Lb、2500磅/Lb

压力	公称尺寸		环号	P		E		F		K		N		L1	
	NPS	DN		in	mm	in	mm	in	mm	in	mm	in	mm	in	mm
600	1	25	R18	2.000	50.80	0.250	6.35	0.344	8.74	2.75	70	0.16	4	3.50	89
	1 ¼	32	R21	2.375	60.33	0.250	6.35	0.344	8.74	3.12	79	0.16	4	3.75	95
	1 ½	40	R23	2.688	68.28	0.250	6.35	0.344	8.74	3.56	90	0.16	4	4.25	108
	1	50	R26	3.250	82.55	0.312	7.92	0.469	11.91	4.25	108	0.19	5	4.25	108
	2 ½	65	R28	4.000	101.60	0.312	7.92	0.469	11.91	5.00	127	0.19	5	4.75	121
	3	80	R32	4.875	123.83	0.312	7.92	0.469	11.91	5.75	146	0.19	5	5.00	127
	4	100	R38	5.875	149.23	0.312	7.92	0.469	11.91	6.88	175	0.19	5	5.75	146
	5	125	R42	7.125	180.98	0.312	7.92	0.469	11.91	8.25	210	0.19	5	6.50	165
	6	150	R47	8.312	211.12	0.312	7.92	0.469	11.91	9.25	241	0.19	5	6.75	171
	8	200	R51	10.625	269.88	0.312	7.92	0.469	11.91	11.88	302	0.19	5	7.75	197
	10	250	R55	12.750	323.85	0.312	7.92	0.469	11.91	14.00	356	0.19	5	8.50	216
	12	300	R60	15.000	381.00	0.312	7.92	0.469	11.91	16.25	413	0.19	5	8.75	222
	14	350	R16	16.500	419.10	0.312	7.92	0.469	11.91	18.00	457	0.19	5	9.25	235
	16	400	R18	18.500	469.90	0.312	7.92	0.469	11.91	20.00	508	0.19	5	10.00	254
	18	450	R20	21.000	533.40	0.312	7.92	0.469	11.91	22.62	575	0.19	5	10.75	273
900	20	500	R23	23.000	584.20	0.375	9.35	0.531	13.49	25.00	635	0.19	6	11.50	292
	24	600	R26	27.250	692.15	0.438	15.88	0.656	26.97	29.50	749	0.22	6	13.25	337
	1	25	R31	2.000	50.80	0.250	6.35	0.344	8.74	2.81	71	0.16	4	5.00	127
	1 ¼	32	R37	2.375	60.33	0.250	6.35	0.344	8.74	3.19	81	0.16	4	5.00	127
	1 ½	40	R41	2.688	68.28	0.250	6.35	0.344	8.74	3.62	92	0.16	4	5.50	140
	2	50	R45	3.750	95.25	0.312	7.92	0.469	11.91	4.88	124	0.12	3	5.75	146
	1 ½	65	R49	4.250	107.95	0.312	7.92	0.469	11.91	5.38	137	0.12	3	6.25	159
	3	80	R53	4.875	123.83	0.312	7.92	0.469	11.91	6.12	155	0.16	4	5.75	146
	4	100	R57	5.875	149.23	0.312	7.92	0.469	11.91	7.12	181	0.16	4	6.75	171
	5	125	R61	7.125	180.98	0.312	7.92	0.469	11.91	8.50	216	0.16	4	7.50	191
	6	150	R65	8.312	211.12	0.312	7.92	0.469	11.91	9.50	241	0.16	4	7.75	197
	8	200	R69	10.625	269.88	0.312	7.92	0.469	11.91	12.12	308	0.16	4	8.75	222
	10	250	R73	12.75	323.85	0.312	7.92	0.469	11.91	14.25	362	0.16	4	9.25	235
	12	300	R77	15.000	381.00	0.312	7.92	0.469	11.91	16.50	419	0.16	4	10.00	254
	14	350	R16	16.500	419.10	0.438	11.13	0.656	16.66	18.38	467	0.16	4	11.00	279
	16	400	R18	18.500	469.90	0.438	11.13	0.656	16.66	20.62	524	0.16	4	11.50	292
1500	18	450	R20	21.000	533.40	0.500	12.70	0.781	19.84	23.38	594	0.19	5	13.25	337
	20	500	R24	23.000	584.20	0.500	12.70	0.781	19.84	25.50	648	0.19	5	14.25	362
	24	600	R27	27.250	692.15	0.625	15.88	1.062	26.97	30.38	772	0.22	6	18.00	457
	1	25	R31	2.000	50.80	0.250	6.35	0.344	8.74	2.81	71	0.16	4	5.00	127
	1 ¼	32	R37	2.375	60.33	0.250	6.35	0.344	8.74	3.19	81	0.16	4	5.00	127
	1 ½	40	R41	2.688	68.28	0.250	6.35	0.344	8.74	3.62	92	0.16	4	5.00	140
	2	50	R45	3.750	95.25	0.312	7.92	0.469	11.91	4.88	124	0.12	3	5.75	146
	2 ½	65	R49	4.250	107.95	0.312	7.92	0.469	11.91	5.38	137	0.12	3	6.25	159
	3	80	R53	5.375	136.53	0.312	7.92	0.469	11.91	6.62	168	0.12	3	7.00	178
	4	100	R57	6.375	161.93	0.312	7.92	0.469	11.91	7.62	194	0.12	3	7.75	197
	5	125	R62	7.625	193.68	0.312	7.92	0.469	11.91	9.00	229	0.12	3	9.75	248
	6	150	R66	8.312	211.12	0.375	9.53	0.531	13.94	9.75	248	0.12	3	10.50	267
	8	200	R70	10.625	269.88	0.438	11.13	0.656	16.66	12.50	318	0.16	4	12.75	324
	10	250	R74	12.750	323.85	0.438	11.13	0.656	16.66	14.62	371	0.16	4	13.50	343
	12	300	R78	15.000	381.00	0.562	14.27	0.906	23.01	17.25	438	0.19	5	15.25	387
	14	350	R16	16.500	419.10	0.635	15.88	1.062	26.97	19.25	489	0.22	6	16.75	425
2500	16	400	R18	18.500	469.90	0.688	17.48	1.188	30.18	21.50	546	0.31	8	18.50	470
	18	450	R20	21.000	533.40	0.688	17.48	1.188	30.18	24.12	613	0.31	8	10.75	527
	20	500	R24	23.000	584.20	0.688	17.48	1.312	33.32	26.50	673	0.38	10	22.25	565
	24	600	R27	27.250	692.15	0.812	20.62	1.438	36.53	31.25	794	0.44	11	25.50	648
	1	25	R35	2.375	60.33	0.250	6.35	0.344	8.74	3.25	83	0.16	4	5.50	140
	1 ¼	32	R39	2.844	72.24	0.312	7.92	0.469	11.94	4.00	102	0.12	3	6.00	152
	1 ½	40	R44	3.250	82.55	0.312	7.92	0.469	11.94	4.50	114	0.12	3	6.75	171
	2	50	R46	4.000	101.60	0.312	7.92	0.469	11.94	5.25	133	0.12	3	7.00	178
	2 ½	65	R50	4.375	111.13	0.375	9.53	0.531	13.49	5.88	149	0.12	3	8.00	203
	3	80	R54	5.000	127.00	0.375	9.53	0.531	13.49	6.62	168	0.12	3	9.00	229
	4	100	R58	6.188	157.18	0.438	11.13	0.656	16.66	8.00	203	0.16	4	10.25	260
	5	125	R63	7.500	190.50	0.500	12.70	0.781	19.84	9.50	241	0.16	4	12.25	311
	6	150	R67	9.000	228.60	0.500	12.70	0.781	19.84	11.00	279	0.16	4	14.00	356
	8	200	R71	11.000	279.40	0.562	14.70	0.906	23.01	13.38	340	0.19	5	15.50	394
	10	250	R75	13.500	342.90	0.688	17.48	1.188	30.18	16.75	425	0.25	6	20.00	508
	12	300	R79	16.000	406.40	0.688	17.48	1.312	33.32	19.50	495	0.31	8	22.00	559